

RoHS
Ready 



SOLARLOK Interconnection System

Table of Contents

The SOLARLOK Concept	1
Large Junction Box — Serial Interconnection	2
Large Junction Box — Parallel Interconnection	3
Medium Junction Box — Serial Interconnection	4, 5
Small Junction Box — Serial Interconnection	6, 7
Mini Junction Box — Serial Interconnection	8
Cable Coupler	9
T-Branch Connector	10
DC/AC Converter Receptacle	11
AC Inverter Connector	12
Solar Cable	13
Solar Cable, 1-Pole	14
Field Wiring, Switching and Protection	15
Wiring Example with Extension Cable	16, 17
UL Applications	18
SolKlip™ — Ground Clip	19, 20
Interconnection Examples	21, 22
Application Tooling	23, 24
Assembly and Installation Guidelines	25-29
Technical Data	30
Part Number Index	31
For More Information	32

Disclaimer

While Tyco Electronics Corporation and its affiliates referenced herein ("Tyco Electronics") have made every reasonable effort to ensure the accuracy of the information in this catalog, Tyco Electronics does not guarantee that it is error-free, nor does Tyco Electronics make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current.

Tyco Electronics reserves the right to make any adjustments to the information contained herein at any time without notice. Tyco Electronics expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. Tyco Electronics' only obligations are those in the Tyco Electronics Standard Terms and Conditions of Sale, and in no case will Tyco Electronics be responsible for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products. Users should independently evaluate the suitability of, and test each product for, their application.

The dimensions, specifications, designs, construction, materials and processes in this catalog are for reference purposes only and are subject to change without notice. Please consult Tyco Electronics for the most current product information.

The export of certain Tyco Electronics products is restricted by the Arms Export Control Act (Title 22, U.S.C. Sec 2751, et seq.) or the Export Administration Act of 1979, as amended (Title 50, U.S.C., App. 2401 et seq.). Orders may be subject to export approval by the U.S. Government. Buyer must comply with all applicable export laws of all applicable jurisdictions. © Copyright 2007 by Tyco Electronics Corporation. All International Rights Reserved.

AMP, SOLARLOK, SOLKLIP, TE LOGO and TYCO ELECTRONICS are trademarks of Tyco Electronics Corporation.

Other products, logos, and company names mentioned herein may be trademarks of their respective owners.

See inside back cover for Global Contacts and phone numbers.

Restriction on the use of Hazardous Substances (RoHS)

At Tyco Electronics, we're ready to support your RoHS requirements. We've assessed more than 1.5 million end items/components for RoHS compliance, and issued new part numbers where any change was required to eliminate the restricted materials. Part numbers in this catalog are identified as:

RoHS Compliant — Part numbers in this catalog are RoHS Compliant, unless marked otherwise. These products comply with European Union Directive 2002/95/EC as amended 1 January 2006 that restricts the use of lead, mercury, cadmium, hexavalent chromium, PBB, and PBDE in certain electrical and electronic products sold into the EU as of 1 July 2006.

NOTE: For purposes of this Catalog, included within the definition of RoHS Compliant are products that are clearly "Out of Scope" of the RoHS Directive such as hand tools and other non-electrical accessories.

NOTE: Information regarding RoHS compliance is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information provided by our suppliers. This information is subject to change. For latest compliance status, refer to our website referenced at right.

Getting the Information You Need

Our comprehensive on-line RoHS Customer Support Center provides a forum to answer your questions and support your RoHS needs. A RoHS FAQ (Frequently Asked Questions) is available with links to more detailed information. You can also submit RoHS questions and receive a response within 24 hours during a normal work week. The Support Center also provides:

- Cross-Reference from Non-compliant to Compliant Products
- Ability to browse RoHS Compliant Products in our on-line catalog
- Downloadable Technical Data Customer Information Presentation
- More detailed information regarding the definitions used above
- So whatever your questions when it comes to RoHS, we've got the answers at www.tycoelectronics.com/leadfree

**RoHS
Customer
Support
Center**

The SOLARLOK Concept

System Features

Junction Box


- Variable wiring options
- Easily accessible
- Simple, fast and cost-effective assembly
- Flat, low profile design
- High current carrying capacity
- Good thermal balance
- Connectorized or direct wire configurations
- Up to four outputs possible
- Up to six internal rails
- Customer-specific solutions
- TÜV and UL approved
- UL File No. E226440

Connector

- Simple on-site processing
- Mating safety provided by keyed housings
- Semi-automatic assembly capability possible
- Multiple plugging and unplugging cycles
- Accommodates solar cable with different insulation diameters
- High current carrying capacity
- Wide temperature operating range
- TÜV and UL approved
- UL File No. E226440

Solar Cable

- Dual wall insulation
- Electron beam cross-linked
- Excellent resistance to U.V., water, ozone, fluids, salt, general weathering
- Excellent resistance to abrasion
- Halogen free, flame retardant, low toxicity
- Very low smoke emissions
- Excellent flexibility and stripping performance
- Different cable diameters
- Operating Temperature from -40 °C up to +110 °C
- Voltage Rating up to 2600 V DC
- IEC 60228 Class 5 (stranded tin plated copper and flexible)
- TÜV or UL certified

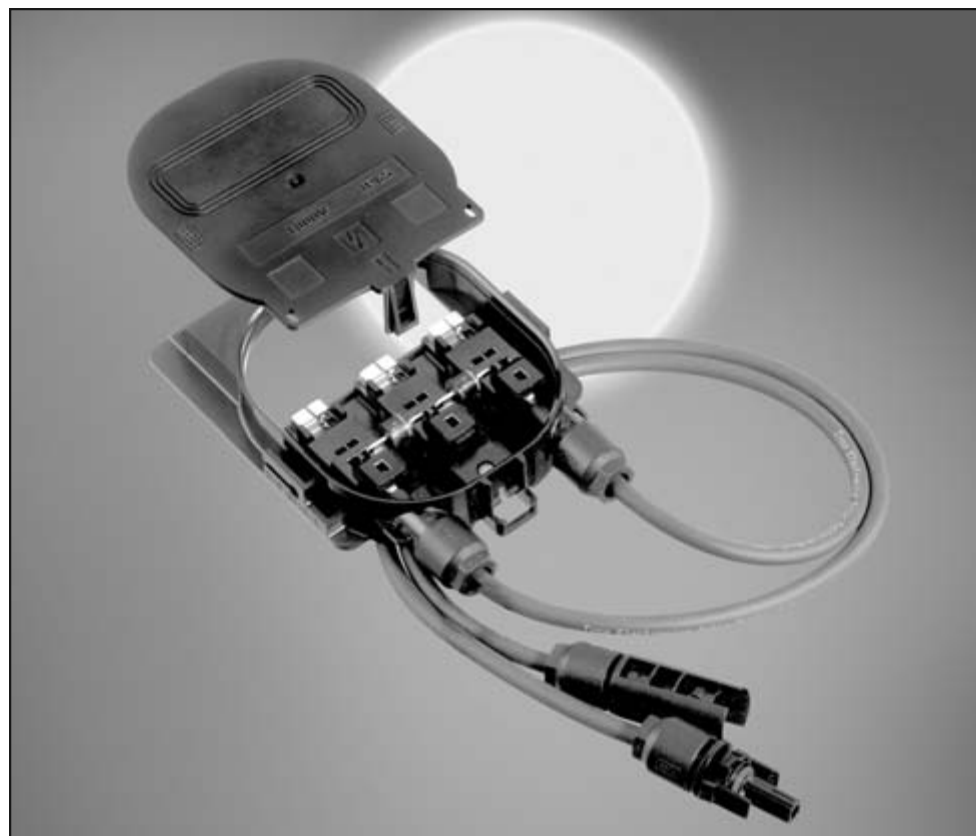

Simple and Reliable System Interconnection of Individual Solar Modules Right to the DC/AC Converters

Market expansion of the formerly regulated energy supply sector, increased global environmental awareness and governments committing themselves to more stringent environmental targets have opened up new opportunities for the photovoltaic industry.

Having served a niche market in the past, the photovoltaics industry now has the opportunity to move into mass production, realizing economies of scale and gaining a greater market share of the world's energy mix.

Tyco Electronics will be contributing to the establishment of this environmentally-friendly technology with the intro-

duction of its SOLARLOK connector system.

SOLARLOK delivers a flexible system solution for easy and reliable interconnections from photovoltaic modules to the DC/AC converter. The entire system concept is based on cost-effective and reliable processing of individual interconnection system components. This significantly reduces installation costs of the solar energy system.

The junction box concept is based on a flexible, open system structure, which allows serial as well as parallel interconnection via direct wire connect or separable connectors. Within the junction box up to six termination rails are available for photovoltaic foil connection.



The male and female cable couplers were designed for high voltage and high current-

carrying capacity in addition to the well-established IP 67 sealing requirement in the photovoltaic industry. Mating safety is provided by polarity keyed housings, fully shrouded contacts, reliable high cycle life, and squeeze to release connection system. In addition, a wide temperature range and fulfillment of worldwide standards for photovoltaic connection systems complement the robust product specification.

The design of the male and female receptacle for the junction box and the DC/AC converter follow the cable coupler "click philosophy" for quick and secure mating even in difficult mounting positions.

If required by the customer, the junction box can be delivered pre-configured with diodes, jumpers, plug connectors, and solar cable pigtails.

Large Junction Box — Serial Interconnection

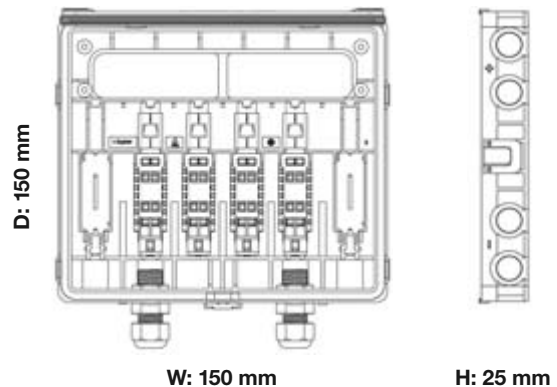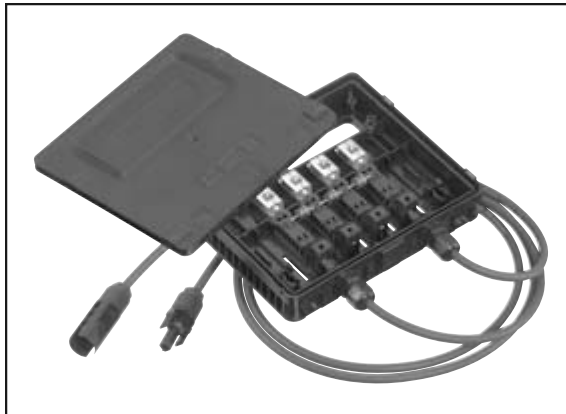


SERIAL INTERCONNECTION							
Configuration	Part Number	Package Quantity	Interconnection Options			Contact Rails	Diodes
			Plug Connector		Direct Wire		
			Plus Keyed	Minus Keyed			
	1-1394723-6	20			☐ ☐	☐ ☐ ☐ ☐	
	2-1394723-5	20			☐ ☐	☐ ☐ ☐ ☐	☐ ☐ ☐ ☐
	1394723-4	20			☐ ☐	☐ ☐ ☐ ☐ ☐	
	1394723-3	20	✓	✓		☐ ☐ ☐ ☐ ☐ ☐	

Note: The ☐ symbol represents unit quantity.

Note: All part numbers are RoHS compliant.

Large Junction Box — Parallel Interconnection

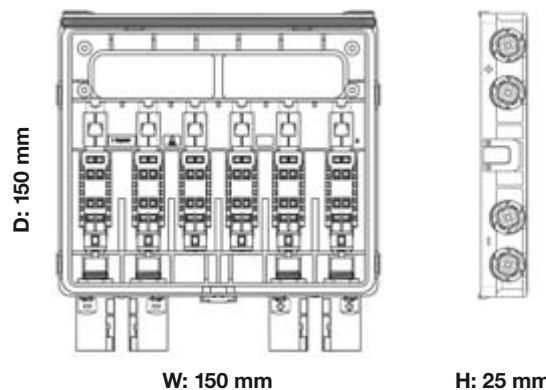



PARALLEL INTERCONNECTION							
Configuration	Part Number	Package Quantity	Interconnection Options			Contact Rails	Diodes
			Plug Connector		Direct Wire		
			Plus Keyed	Minus Keyed			
	1394723-5	20	✓	✓			
	1394723-6	20					
	1394723-9	20					

Note: The □ symbol represents unit quantity.

Note: All part numbers are RoHS compliant.

Medium Junction Box — Serial Interconnection

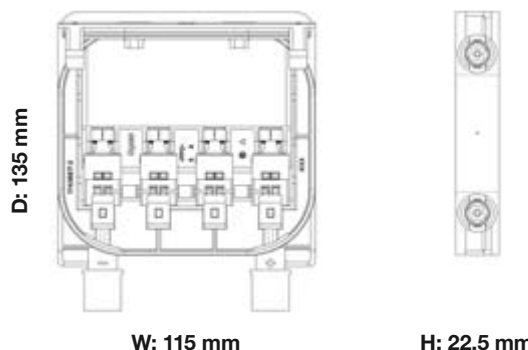

SERIAL INTERCONNECTION							
Configuration	Part Number	Package Quantity	Interconnection Options			Contact Rails	Diodes
			Plug Connector		Direct Wire		
			Plus Keyed	Minus Keyed			
	1740699-1	60			☐	☐ ☐ ☐ ☐	☐ ☐ SL1010
	1740699-6*	35			☐	☐ ☐ ☐ ☐	☐ ☐ SL1010
	1740700-1	60	✓	✓		☐ ☐ ☐ ☐	☐ ☐ SL1010
	1740700-3**	35	✓	✓		☐ ☐ ☐ ☐	☐ ☐ SL1010
	1740971-1	60			☐	☐ ☐ ☐ ☐	☐ ☐ SL1515
	1740971-3*	35			☐	☐ ☐ ☐ ☐	☐ ☐ SL1515
	1740972-1	60	✓	✓		☐ ☐ ☐ ☐	☐ ☐ SL1515
	1740972-3**	35	✓	✓		☐ ☐ ☐ ☐	☐ ☐ SL1515

* Junction Box Assembly with two 100 cm long 4.0 mm² black solar cable and plug connector.


** Junction Box Assembly with one 200 cm long 4.0 mm² black solar cable and two plug connectors.

Note: The ☐ symbol represents unit quantity.
All part numbers are RoHS compliant.

Medium Junction Box — Serial Interconnection (Continued)



D: 135 mm



W: 115 mm



H: 22.5 mm

SERIAL INTERCONNECTION


Configuration	Part Number	Package Quantity	Interconnection Options			Contact Rails	Diodes
			Plug Connector		Direct Wire		
			Plus Keyed	Minus Keyed			
	1740657-1	60			☐ ☐	☐ ☐ ☐ ☐	☐ SL1010 ☐ SL1515
	1740657-8*	35			☐ ☐	☐ ☐ ☐ ☐	☐ SL1010 ☐ SL1515
	1740658-1	60	✓	✓		☐ ☐ ☐ ☐	☐ SL1010 ☐ SL1515
	1740658-3**	35	✓	✓		☐ ☐ ☐ ☐	☐ SL1010 ☐ SL1515
	1740657-9	60			☐ ☐	☐ ☐ ☐ ☐	☐ SL1515
	1-1740657-0*	35			☐ ☐	☐ ☐ ☐ ☐	☐ SL1515
	1740658-4	60	✓	✓		☐ ☐ ☐ ☐	☐ SL1515
	1740658-5**	35	✓	✓		☐ ☐ ☐ ☐	☐ SL1515

* Junction Box Assembly with two 100 cm long 4.0 mm² black solar cable and plug connector.

** Junction Box Assembly with one 200 cm long 4.0 mm² black solar cable and two plug connectors.

Note: The ☐ symbol represents unit quantity.
All part numbers are RoHS compliant.

Small Junction Box — Serial Interconnection

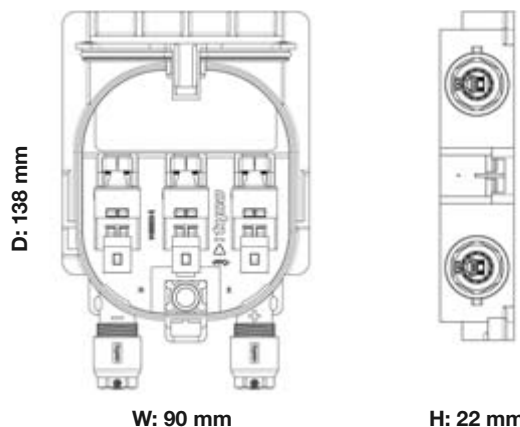

SERIAL INTERCONNECTION							
Configuration	Part Number	Package Quantity	Interconnection Options			Contact Rails	Diodes
			Plug Connector		Direct Wire		
			Plus Keyed	Minus Keyed			
	1740220-4	80			☐ ☐	☐ ☐	
	1740220-2	80			☐ ☐	☐ ☐	☐
	1740425-3*	48			☐ ☐	☐ ☐	☐
	1740220-3	80			☐ ☐	☐ ☐ ☐	
	1740220-1	80			☐ ☐	☐ ☐ ☐ ☐	☐ ☐
	1740425-1**	48			☐ ☐	☐ ☐ ☐ ☐	☐ ☐


Note: The ☐ symbol represents unit quantity.

* Junction Box Assembly with two 70 cm long 4.0 mm² black solar cable and plug connector.


** Junction Box Assembly with two 85 cm long 4.0 mm² black solar cable and plug connectors.

Note: All part numbers are RoHS compliant.

Small Junction Box — Serial Interconnection (Continued)

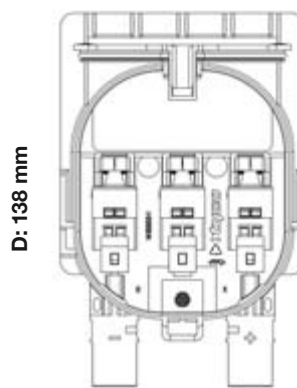

W: 90 mm



H: 22 mm

SERIAL INTERCONNECTION							
Configuration	Part Number	Package Quantity	Interconnection Options			Contact Rails	Diodes
			Plug Connector		Direct Wire		
			Plus Keyed	Minus Keyed			
	1418867-2	80	✓	✓		☐ ☐	
	1418867-5	80	✓	✓		☐ ☐	☐
	1-1418867-3*	48	✓	✓		☐ ☐	☐
	1418867-1	80	✓	✓		☐ ☐ ☐	
	1418867-6	80	✓	✓		☐ ☐ ☐	☐ ☐
	1-1418867-2**	48	✓	✓		☐ ☐ ☐	☐ ☐


Note: The □ symbol represents unit quantity.

* Junction Box Assembly with one 140 cm long 4.0 mm² black solar cable and two plug connectors.

** Junction Box Assembly with one 170 cm long 4.0 mm² black solar cable and two plug connectors.

Note: All part numbers are RoHS compliant.

Mini Junction Box — Serial Interconnection

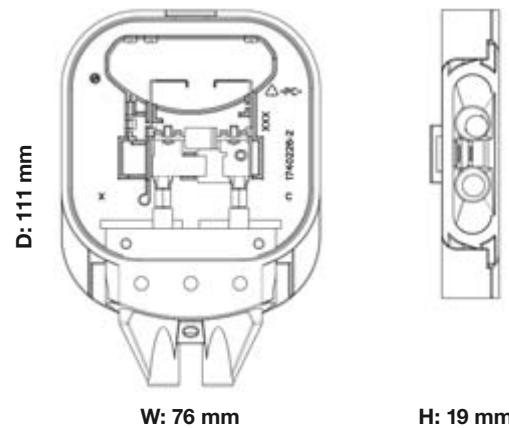

SERIAL INTERCONNECTION						
Configuration	Part Number	Package Quantity	Contact Rail Shape	Direct Wire	Contact Rails	Diodes
	1740863-1*	80	Straight	☐	☐	☐
	1740863-2*	80	Right-Angle	☐	☐	☐

Note: The ☐ symbol represents unit quantity.

* Junction Box Assembly with two 85 cm long 4.0 mm² black solar cable and plug connector.

Note: All part numbers are RoHS compliant.

Cable Coupler

Wire Size (mm ²)	Female Cable Coupler		Male Cable Coupler		Package Quantity
	Plus Keyed	Minus Keyed	Plus Keyed	Minus Keyed	
2.5	1394462-1	1394462-2	1394461-1	1394461-2	100
4.0	1394462-3	1394462-4	1394461-3	1394461-4	100
6.0	5-1394462-5	5-1394462-6	6-1394461-5	6-1394461-6	100


Male Cable Coupler Not Keyed, only for Junction Box Serial Interconnection  	Wire Size (mm ²)	Male Cable Coupler	Package Quantity
	2.5	6-1394461-1	100
	4.0	6-1394461-2	100
	6.0	6-1394461-4	100

	Cable Coupler with Connector Latch Locking Clip	
	Connector Latch Locking Clip	Package Quantity
	2008116-1	100

Note: All part numbers are RoHS compliant.

T-Branch Connector

Parallel Interconnection using T-Branch Connector (Male-to-Male)

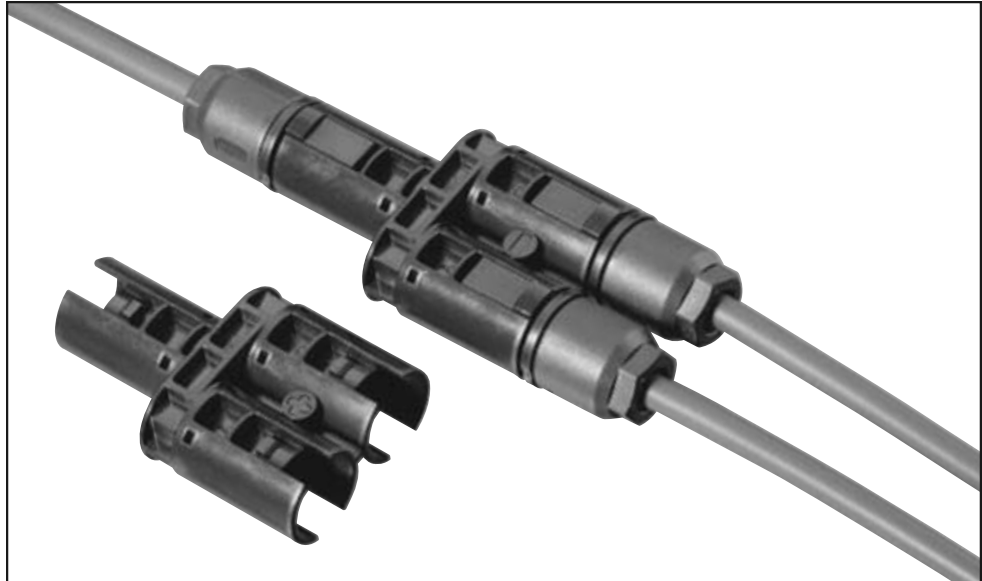

T-Branch Connector		Part Number	Package Quantity
Plus Keyed	Minus Keyed		
✓		1534611-1	20
	✓	1534611-2	20

Parallel Interconnection using T-Branch Connector (Female-to-Male)



T-Branch Connector		Part Number	Package Quantity
Plus Keyed	Minus Keyed		
✓		1740277-1	20
	✓	1740277-2	20

Note: All part numbers are RoHS compliant.

DC/AC Converter Receptacle



O-Ring and Metal Nut



Flat Seal and Plastic Nut



With Cover

Wire Size		Keying		Part Number	Package Quantity	Remarks
2.5 mm ² (AWG 14)	4.0 mm ² (AWG 12)	Plus	Minus			
✓		✓		1394738-1	100	O-Ring and Metal Nut
✓			✓	1394738-2	100	
	✓	✓		1394738-3	100	
	✓		✓	1394738-4	100	

✓		✓		1740210-1	100	Flat Seal and Plastic Nut — Black
✓			✓	1740210-2	100	
	✓	✓		1740210-3	100	
	✓		✓	1740210-4	100	
✓		✓		1740210-7	100	Flat Seal and Plastic Nut — Red
✓			✓	1740210-8	100	Flat Seal and Plastic Nut — Blue
	✓	✓		1740210-9	100	Flat Seal and Plastic Nut — Red
	✓		✓	1-1740210-0	100	Flat Seal and Plastic Nut — Blue

✓	✓	✓	✓	1394739-1	100	Cover
---	---	---	---	-----------	-----	-------

Note: All part numbers are RoHS compliant.

AC Inverter Connector

Product Facts

- **Current Rating:**
30 A
- **Voltage Rating:**
400 V
- **Protection Degree:**
IP67 (mated)
- **No. of Positions:**
5 Poles
- **Temperature Range:**
-40 °C up to +50 °C
- **Wire Size Range:**
2.5–6.0 mm²
- **Approvals:**
 - VDE certified
 - UL pending




Configuration	5 Pole	Cable Length 200 mm (5 x 4 mm ²)	Metal Nut	Plastic Nut	Part Number	Package Quantity
	✓	✓	✓		1740483-1	24
	✓	✓		✓	1740483-2	24
	✓				1740479-1	24
	✓	✓	✓		1740493-1	24
	✓	✓		✓	1740493-2	24

Note: All part numbers are RoHS compliant.

Solar Cable

Product Facts

- Dual wall insulation
- Electron beam cross-linked
- Excellent resistance to UV, water, ozone, fluids, salt, general weathering
- Excellent resistance to abrasion
- Halogen free, flame retardant, low toxicity
- Very low smoke emissions
- Excellent flexibility and stripping performance
- Wire size from 2.5 mm² up to 6.0 mm²

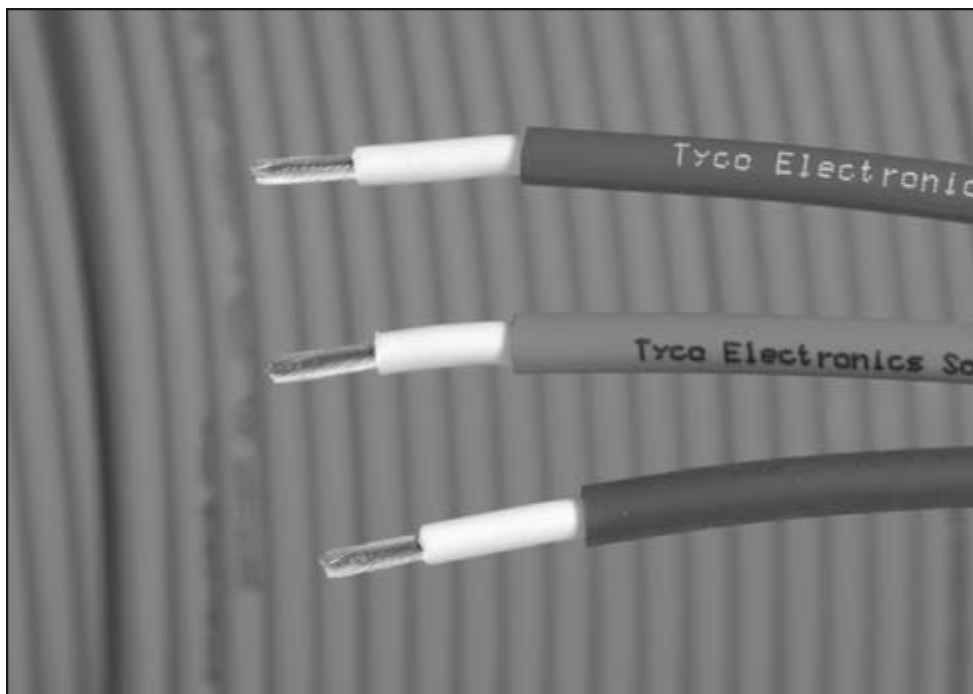

As part of expanding the SOLARLOK Product Line, Tyco Electronics has specified a wire that is designed to meet the harsh environmental conditions typical in the wiring of photovoltaic installations.

The flexible, dual wall, halogen free and cross linked solar wire offers long term stability and TÜV approval.

Its outstanding features include: high resistance against environmental conditions like humidity, UV-radiation and ozone.

In addition, it has excellent resistance to abrasion and temperature extremes.

The wire has a high dielectric withstanding voltage and with its fine-stranded, tin plated copper conductor, it is easy to handle and to strip.

Standards

Approval:

- IEC 60228 Class 5 (stranded tin plated copper and flexible);
- TÜV certified



Material and Finish

Conductor:

Stranded tin plated copper

Insulation:

Electron beam cross-linked Polyolefin

Sheath:

Electron beam cross-linked halogen free Polyolefin

Color:

Black, blue, red

Mechanical Features

Max. Conductor Temperature

Continuous: +110 °C

At Short Circuit: +250 °C

Min. Operating Temperature

Free Installation: -25 °C

Fixed Installation: -40 °C

Wire Size Range:

2.5 mm² (AWG 14),

4.0 mm² (AWG 12),

6.0 mm² (AWG 10)

Min. Bending Radius:

5 x cable wire diameter, fixed installation

Electrical Features

Voltage Rating U₀/U:

1800/3000 V AC / 2600 V DC

Test Voltage for 5 Minutes:

6000 V

Max. Current Carrying Capacity (Free in Air):

36 A up to 116 A (size dependent)

Solar Cable, 1-Pole

Tyco Electronics Solar Cable, 1-Pole

- TÜV approved
- UL approved



Wire Size Range		Outer Diameter		Color	Old Part Number	New Part Number	Package Quantity (m)	Approvals
(mm²)	(AWG)	(mm)	(Inch)					TÜV
2.5	—	5.1	0.20	Black	956297-1	4-1899259-9	500	✓
					1-956297-1	4-1899259-5	100	✓
				Red	956297-2	5-1899259-0	500	✓
					1-956297-2	4-1899259-7	100	✓
				Blue	956297-3	5-1899259-1	500	✓
					1-956297-3	4-1899259-8	100	✓
4.0	—	5.7	0.22	Black	956298-1	5-1899259-5	500	✓
					1-956298-1	5-1899259-2	100	✓
				Red	956298-2	5-1899259-6	500	✓
					1-956298-2	5-1899259-3	100	✓
				Blue	956298-3	5-1899259-7	500	✓
					1-956298-3	5-1899259-4	100	✓
6.0	—	6.2	0.24	Black	956299-1	6-1899259-4	500	✓
					1-956299-1	6-1899259-1	100	✓
				Red	956299-2	6-1899259-5	500	✓
					1-956299-2	6-1899259-2	100	✓
				Blue	956299-3	6-1899259-6	500	✓
					1-956299-3	6-1899259-3	100	✓

Wire Size Range		Outer Diameter		Color	Part Number	Package Quantity (ft)	Approvals
(mm²)	(AWG)	(mm)	(Inch)				UL
—	14	—	0.17	Black	1986166-2	500	✓ *
					1986166-3	2500	✓ *
—	12	—	0.19	Black	1986165-2	500	✓ *
					1986165-3	1600	✓ *
—	10	—	0.21	Black	1986164-2	500	✓ *
					1986164-3	1000	✓ *

* Technical Data upon request.


Note: All part numbers are RoHS compliant.

Field Wiring, Switching and Protection

Product Features


- Modular product concept
- One- /two-pole switches
- Current up to 80 A DC
- Voltage up to 1000 VDC
- Compact, standardized design
- Proven quality

Switching




- One- /two-pole switch
- Main switch function
- Lockable
- Current up to 63 A DC
- Voltage up to 900 V U_{oc}

Collecting



- 1 to 10 strings input
- Cable cross section up to 10 mm²
- SOLARLOK connectors
- Various cable glands
- Current up to 80 A DC
- Voltage up to 1000 V DC

Protecting



- Lightning protection



Your Solution




The photovoltaic integrator looks for best fit solutions to wire various types and sizes of solar generators.

The new product concept from Tyco Electronics provides this flexibility to photovoltaic integrators.

The modular product can be comprised of a switch, lightning protection, fuses or any combination of these or other commonly available components.

We can customize a product to fit your specific application. Please contact us with your requirements.

Wiring Example with Extension Cables

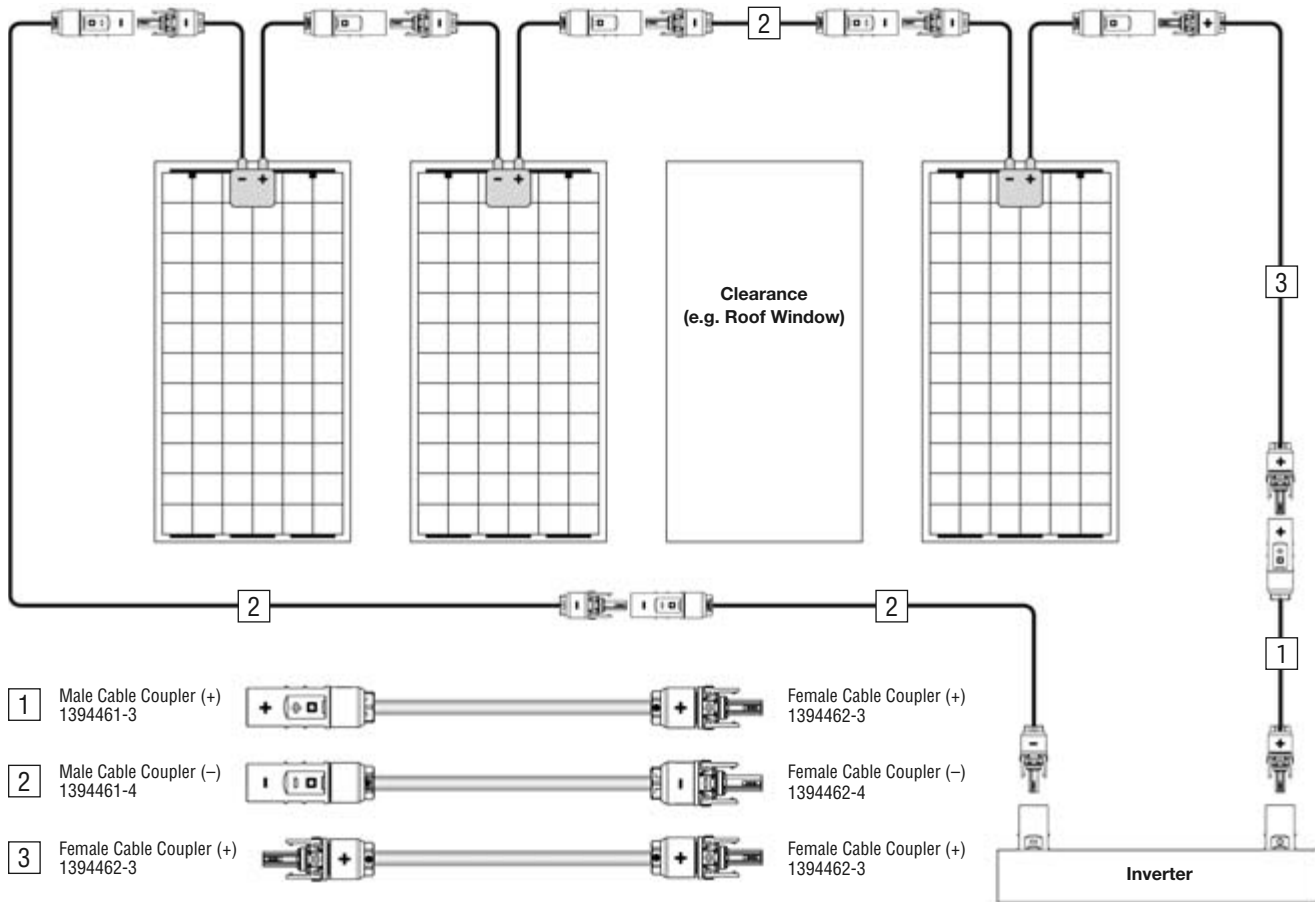

Configuration Example at 4.0 mm².

IEC/TÜV Applications

Cable Assembly

Wire Size:
4.0 mm²


Color:
Black

Cable Assembly Version	Part Numbers for Cable Length				
	1 m	3 m	5 m	10 m	20 m
1	—	—	1698664-1	1698664-2	1698664-3
2	1698665-1	1698665-2	1698665-3	1698665-4	1698665-5
3	1698726-1	—	1698728-1	1698728-2	1698728-3

More variants (cable length, wire diameter, color) upon request.

Note: All part numbers are RoHS compliant.

Wiring Example with Extension Cables (Continued)

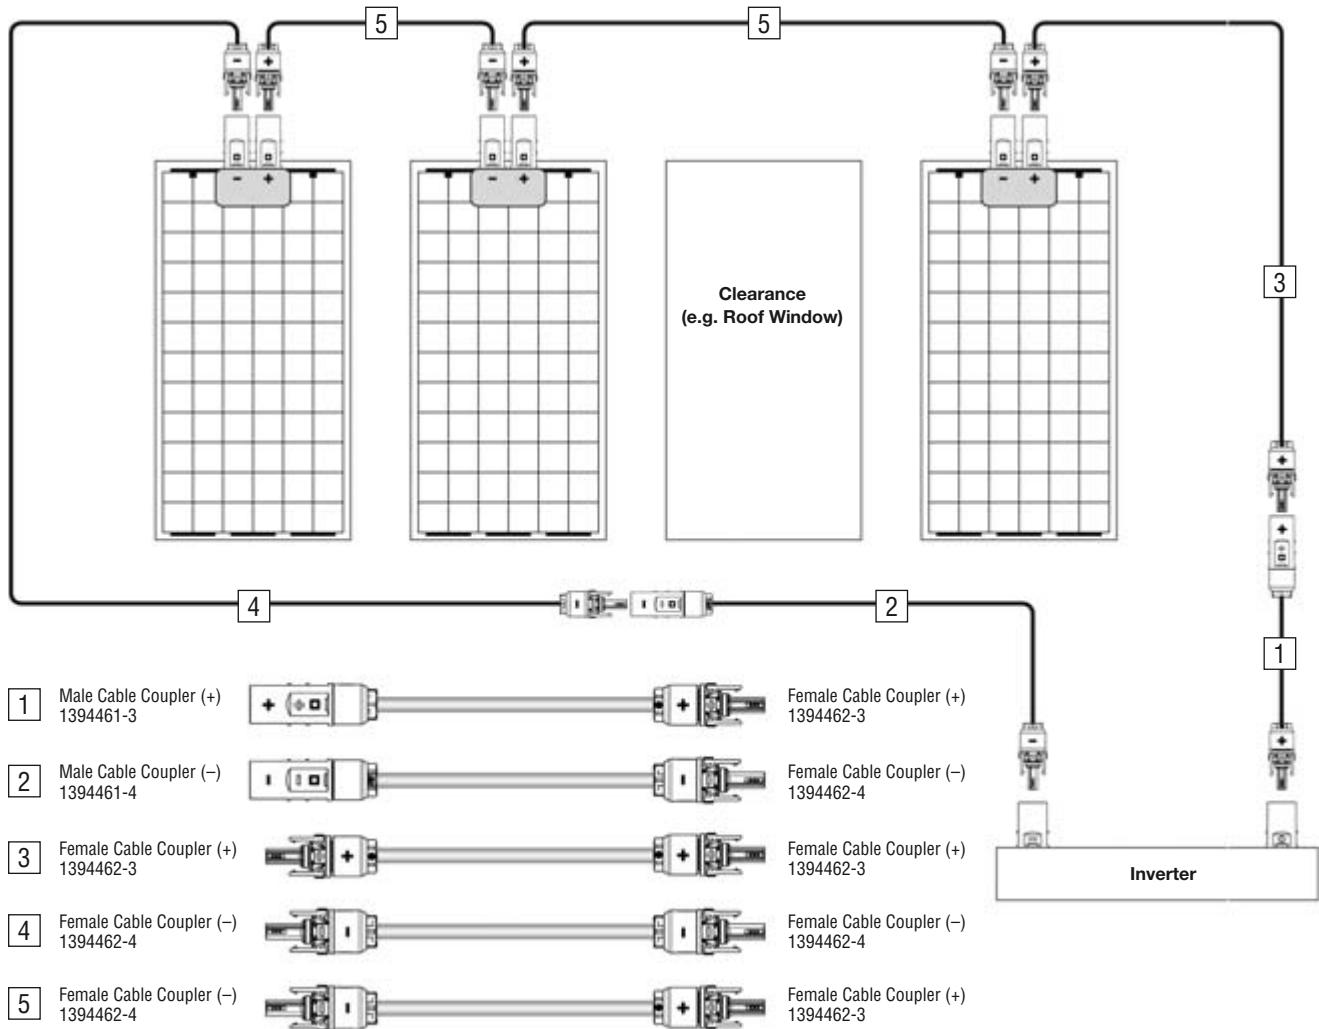

Configuration Example at 4.0 mm².

IEC/TÜV Applications

Cable Assembly

Wire Size:
4.0 mm²

Color:
Black

Cable Assembly Version	Part Numbers for Cable Length				
	1 m	3 m	5 m	10 m	20 m
1	—	—	1698664-1	1698664-2	1698664-3
2	1698665-1	1698665-2	1698665-3	1698665-4	1698665-5
3	1698726-1	—	1698728-1	1698728-2	1698728-3
4	1698727-1	—	1698727-2	1698727-3	1698727-4
5	on request	on request	on request	on request	on request

More variants (cable length, wire diameter, color) upon request.

Note: All part numbers are RoHS compliant.

Wiring Example with Extension Cables for UL Applications



Configuration Example for 12 AWG.

UL Applications

Cable Assembly

Wire Size:

12 and 10 AWG

Color:

Black

Cable Assembly Version	Part Numbers for Cable Length				
	3 ft	5 ft	25 ft	50 ft	100 ft
12 AWG 1	1986228-1	1986228-2	1986228-3	1986228-4	1986228-5
12 AWG 2	1986229-1	1986229-2	1986229-3	1986229-4	1986229-5
12 AWG 3	1986230-1	1986230-2	1986230-3	1986230-4	1986230-5
12 AWG 4	1986231-1	1986231-2	1986231-3	1986231-4	1986231-5
12 AWG 5	1986232-1	1986232-2	1986232-3	1986232-4	1986232-5
10 AWG 1	1-1986228-1	1-1986228-2	1-1986228-3	1-1986228-4	1-1986228-5
10 AWG 2	1-1986229-1	1-1986229-2	1-1986229-3	1-1986229-4	1-1986229-5
10 AWG 3	1-1986230-1	1-1986230-2	1-1986230-3	1-1986230-4	1-1986230-5
10 AWG 4	1-1986231-1	1-1986231-2	1-1986231-3	1-1986231-4	1-1986231-5
10 AWG 5	1-1986232-1	1-1986232-2	1-1986232-3	1-1986232-4	1-1986232-5

More variants (cable length, gauge, connectors) upon request.

Note: All part numbers are RoHS compliant.

SolKlip™ — Ground Clip

Product Features

- Self-tapping screw
- Quick and easy mounting
- Four-point contact to wire
- Low interface resistance
- Toolless termination
- Re-terminateable up to 5 times
- UV resistant
- Weather-proof
- UL approved
- RoHS compliant



Tyco Electronics' newest innovation provides the photovoltaic installers with a solution for grounding PV panels and mounting frames. The Tyco Electronics SolKlip brings a new ground connection solution to the market by the utilizing well-known insulation displacement termination technology.

Existing solutions typically require the use of ring tongue crimp terminals which have to be crimped first at a specific location on the wire, a hole is then drilled into the mounting surface, and the product is finally mounted on the frame with a separate thread forming or self-tapping screw. The new Tyco Electronics SolKlip provides an extremely simplified solution for terminating a continuous-run ground wire.

Termination times are measured in seconds using the pre-mounted Tyco Electronics SolKlip thereby saving time and reducing wiring costs substantially. The four-point wire contact inherent in the design optimizes grounding performance and provides protection against contact problems due to its low interface resistance.

The Tyco Electronics SolKlip can be used with un-insulated copper wires from 12 AWG to 10 AWG. The retained-force nature of the contact provides a robust interface that minimizes vibration or thermally induced termination problems that often occur with traditional ground-screw connections. Termination of the wire is safely and easily accomplished toollessly by simply inserting the wire and closing the cover.


With a tensile strength of up to 36 kg, the UV-resistant enclosure provides a secure termination even in roughest environmental and assembly conditions. As an added benefit, the connection can be opened and re-terminated again up to five times.

Retrofitting the Tyco Electronics SolKlip on panels or frames can be done at any time by simply drilling a mounting hole in the frame and attaching the terminal to the frame using the integrated, self-tapping screw. This ensures a secure connection with the panel and/or frame.


The patent-pending Tyco Electronics SolKlip ground terminal supplements the existing Tyco Electronics SOLARLOK product portfolio and offers the electrician yet another valuable component for simple and fast wiring of a PV-system.

SolKlip™ — Ground Clip (Continued)


3 Easy Steps to Ground Your PV System




Insert ...



... Push ...




... Ready!

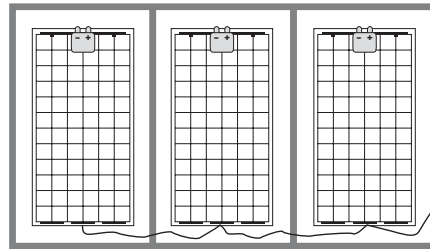

Yesterday




- Screw
- Washer
- Lock Washer
- Ring Tongue
- Screwdriver
- Drill
- Pliers

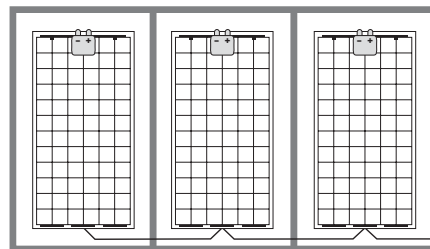

Today



- SolKlip

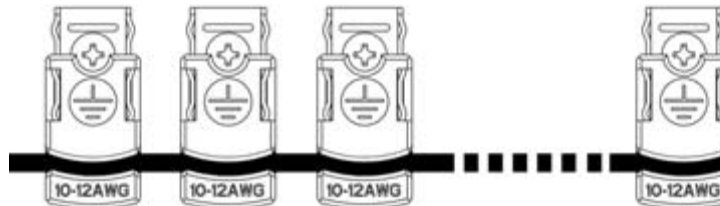

Click

Click

Click

Description

SolKlip ground clips are designed for solar panel grounding applications using solid un-insulated copper 10 AWG and 12 AWG.

Applications

Solar panels and related products that require grounding for safety reasons. Applications include: wire jumpers between solar panels, solar roof tiles and between panels and the AC/DC inverters.

Electrical

The electrical performance of this product will meet the tough requirements of photovoltaic grounding applications.

Product Offering & Dimensions

SolKlip for Solar Grounding Part No. 1954381-1 to handle 12–10 AWG solid, un-insulated ground wire.

Application Tooling

No special tooling required.

Standards and Specifications

SolKlip Grounding Clip: UL 467 pending, a requirement for UL 1703 solar panel listing.

UL 486A-B pending, also a requirement as part of the UL 1703 approval listing.

Materials

Housing:
Durable PPT


Contact:
High conductivity copper alloy

Mechanical

The mechanical properties of this product will meet the tough requirements for grounding applications as specified in the UL requirements.

Interconnection Examples


Serial Interconnection for Junction Boxes with Cable Glands (4.0 mm² Wiring)

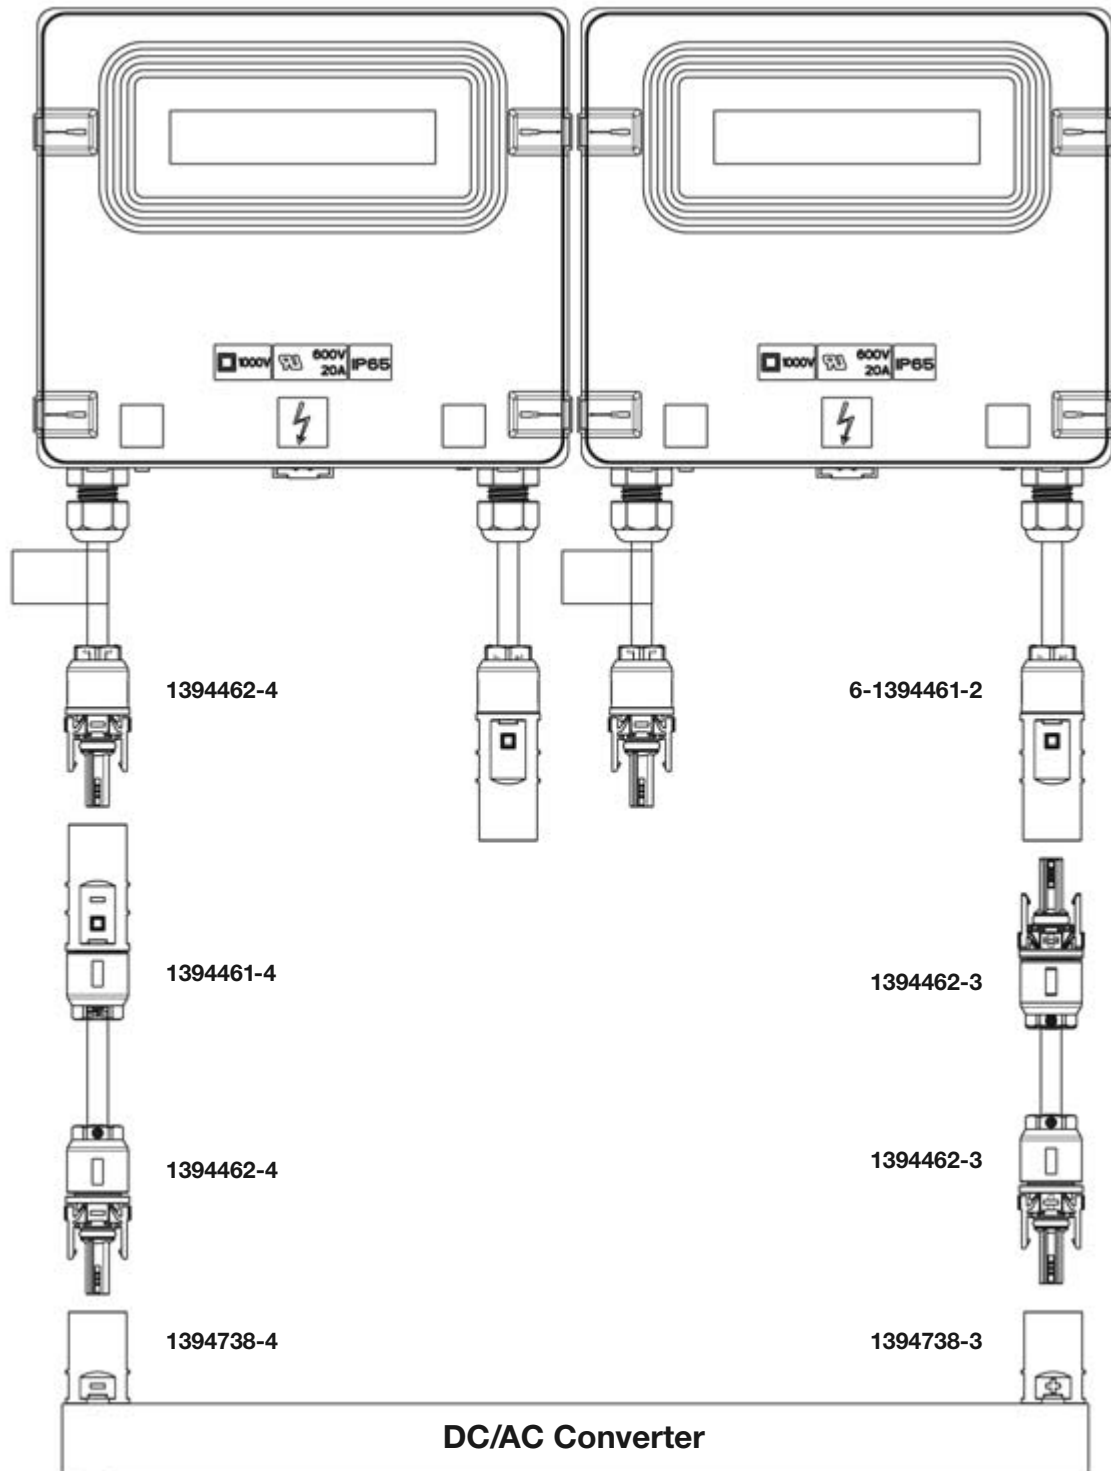

Note: All part numbers are RoHS compliant.

Interconnection Examples (Continued)

**Serial Interconnection for Junction Boxes with Plug Connectors
(4.0 mm² Wiring)**

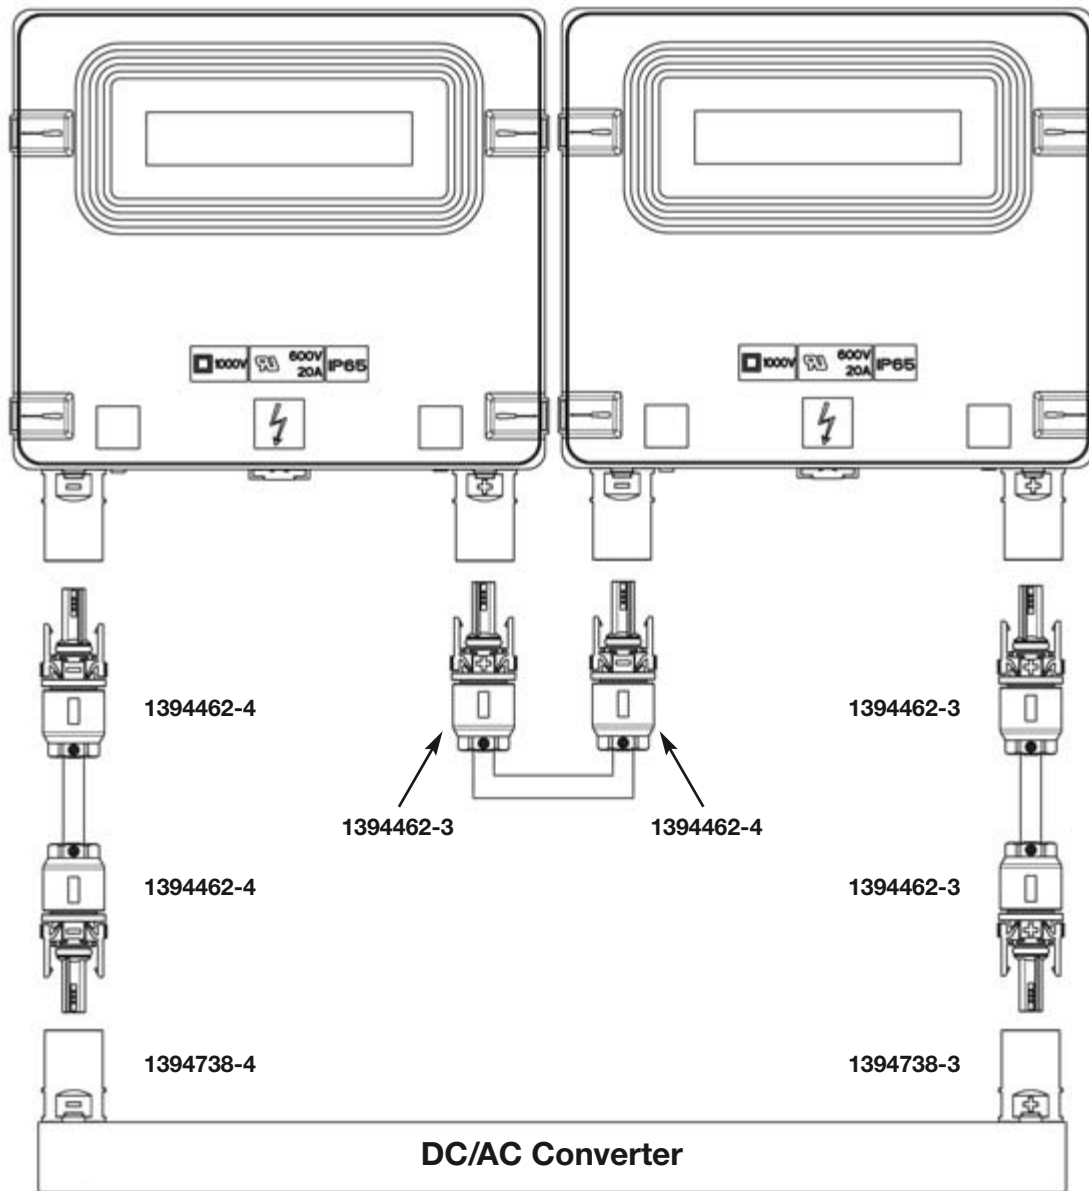

Note: All part numbers are RoHS compliant.

Application Tooling (Continued)

Cable Assembly Tooling



Hand Crimping Tool

incl. Vario Crimp Head and Locator

Part Numbers

1-1579004-1 (1.5 + 2.5 mm²)

1-1579004-2 (4.0 + 6.0 mm²)

Vario Crimp Head

7-1579001-8 (1.5 + 2.5 mm²)

7-1579001-9 (4.0 + 6.0 mm²)



Extraction Tool

suitable for all wire sizes

Part No. **1102855-3**



Insulation Stripper

includes length stop for all wire sizes: 1.5 mm², 2.5 mm², 4.0 mm² and 6.0 mm².

Suitable for Tyco Electronics Solar Cable.

Part No. **4-1579002-2**

SOLARLOK Electric Terminator CS 200

Base Machine:
Part No. **539630-1**



Adapter for Vario Crimp Head:

Part No. **1579000-4**

Vario Crimp Head

(1.5 and 2.5 mm²):

Part No. **7-1579001-8**

Vario Crimp Head

(4.0 and 6.0 mm²):

Part No. **7-1579001-9**

Note: All part numbers are RoHS compliant.


Application Tooling (Continued)

Junction Box Assembly Tooling




Wire Spring Clamp Tool

Part No. **1579007-2**

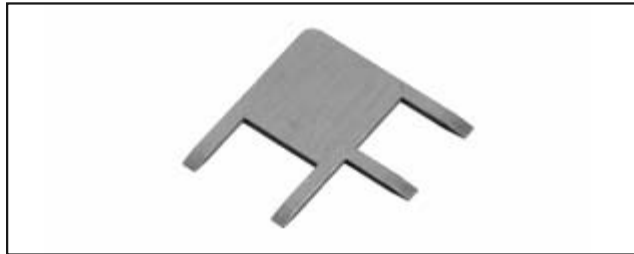

Dioden/Jumper Spring Clamp Tool

Part No. **1579007-5**

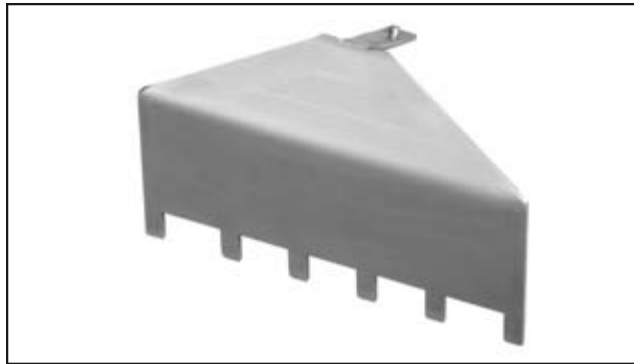

Foil Spring Clamp Tool

Part No. **1579007-3** Large Box
Part No. **1740969-1** Medium Box
Part No. **1740969-2** Small Box

Field Service Kit

Part No. **1534858-1**
(Metric & AWG)



Kit includes the following parts:

- 100 Cable Coupler (Housings, Plus and Minus coded)
- Crimp Contacts (4.0 and 6.0 mm²)
- Strain Relief
- Seals
- **Hand Crimp Tool:**
Part No. **1-1579004-2**
- **Extraction Tool:**
Part No. **1102855-3**
- **Insulation Stripper:**
Part No. **4-1579002-2**

Note: All part numbers are RoHS compliant.

Assembly and Installation Guidelines

Table of Contents	Page
SOLARLOK Plug Connectors	25
1. General Comments	25
2. Termination of the Cable Wires / Crimping of the Contacts	25
3. Handling of the Connectors	25
3.1 Selection of Sealing Grommet for Cable Connectors	25
3.2 Connector Latching	27
3.3 Disconnecting	27
3.4 DC/AC Converter Receptacle	28
4. Application Examples	29
5. Storage	29
6. Tooling	29

SOLARLOK Plug Connector

Attention: This connector is to be used only to interconnect firmly fixed cables.

Do not disconnect under load.

Current path should only be disconnected using approved disconnect devices.

Cable assemblies shall be labeled with Part No. **1394470-1**.

To protect against shock, ensure that conductors and their associated connectors are separated from opposite polarity components.

1. General Comments

Any kind of pollution (dust, humidity, etc.) during the assembly process can degrade contact and connector performance. This applies in particular to the seals and the crimping of the contacts.

A clean assembly environment is therefore essential.

2. Termination of the Cable Wires and Crimping of the Contacts

SOLARLOK connectors use different crimp contacts for various wire gauges. Possible wire gauges are 1.5 mm², 2.5 mm², 4.0 mm², 5.3 mm² und 6.0 mm² resp. AWG 16, AWG 14, AWG 12 and AWG 10.

The tools to be used are selected based upon the wire gauge.

For the application specification, please refer to specification # 114-74013.

3. Handling of the Connectors

3.1 Selection of Sealing Grommet for Cable Connectors

Use only appropriate wire gauges.

Besides the standard seal/pinch ring combination further five different seals are available.

- 4.0 mm grommet inner diameter (for insulation diameter from 3.2 to 4.3 mm), Part No. **1394465-5**
- 5.0 mm grommet inner diameter (for insulation diameter from 4.3 to 5.3 mm), Part No. **1394465-1**
- 6.0 mm grommet inner diameter (for insulation diameter from 5.3 to 6.2 mm), Part No. **1394465-2**
- 7.0 mm grommet inner diameter (for insulation diameter from 6.2 to 7.2 mm), Part No. **1394465-3**
- 8.0 mm grommet inner diameter (for insulation diameter from 7.2 to 8.0 mm), Part No. **1394465-4**

The grommet has to be matched with the outer diameter of the solar cable (see customer drawing, Part No. **1394461** and Part No. **1394462**) and the pinch ring (Part No. **1418677-2**) must be applied.

Note: All part numbers are RoHS compliant.

Assembly and Installation Guidelines (Continued)

When assembling the connectors, the following sequence must be followed:

- ① Stripping the Wire (please refer to application specification #114-74013)



Fig. 1

- ② Insert the stripped wire into the wire crimp barrel until it stops.
While holding the wire in place, squeeze tool handles together until ratchet releases.



Fig. 2

- ③ Place seal/pinch ring combination into the connector housing until it stops.

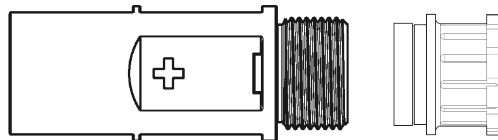


Fig. 3

- ④ Place backshell onto the connector housing.

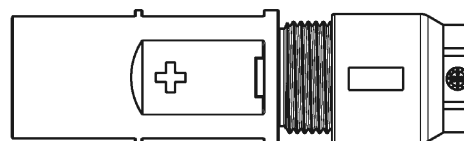


Fig. 4

- ⑤ Push contact with cable into the connector housing until you hear the contact is locked into position

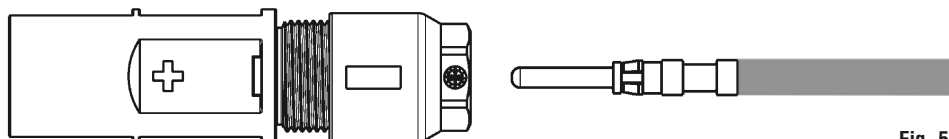


Fig. 5

- ⑥ Tighten backshell nut to 1.5 Nm

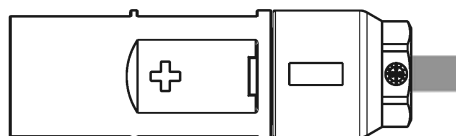


Fig. 6

Assembly and Installation Guidelines (Continued)

3.2 Connector Latching

When mating the SOLARLOK connectors, ensure the following:

- Connectors labeled with a plus or minus are keyed and can only be mated to similarly marked and keyed connectors.

CAUTION:

The “neutral” designated pin connectors incorporate no keying features and must only be used for Serial Interconnection of Photovoltaic Modules. The neutral product should not be used where maintaining polarity is critical.

The polarity of the “neutral” connector must be labeled with Part No. **1394725-1** or Part No. **1394725-2** nearby the connector.

- The connector system is fully latched only when the latches are flush with the mating connector.
- After the connector is fully latched, the optional latch locking clip may be snapped into place.

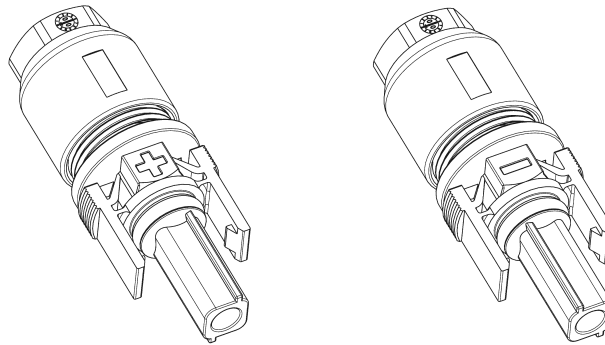


Fig. 7
(Female Connector)

3.3 Disconnecting

CAUTION: This connector must not be disconnected under load.

Disconnect circuit from load before unplugging connectors.

Cable assemblies should be labeled using Tyco Label, Part No. **1394470-1**.

Unmating of the connector

CAUTION: Do not disconnect the connector under load!

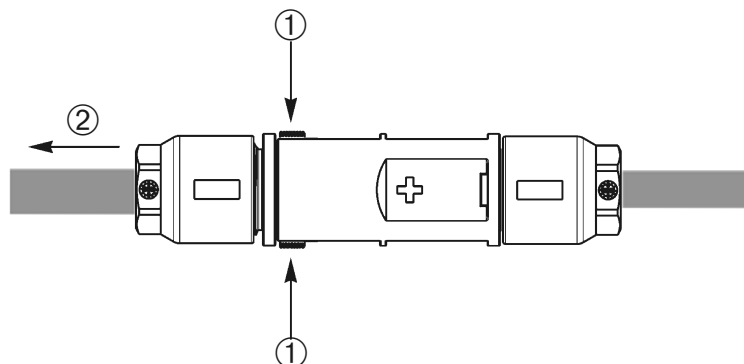


Fig. 8

- ① The locking mechanism is opened by depressing the latches.
- ② Pull out the connectors. While depressing the latches, disconnect the connector by pulling the connector halves apart.

Note: All part numbers are RoHS compliant.

Assembly and Installation Guidelines (Continued)

3.4 DC/AC Converter Receptacle

- ① Place a single wire seal onto the wire and strip wire (single wire seals are not available with every version).



Fig. 9

- ② Crimp the contact using the correct applicator for the wire gauge (# 114-74013)



Fig. 10

- ③ Place O-ring onto the connector housing; push in wire to stop until contact locks into the housing

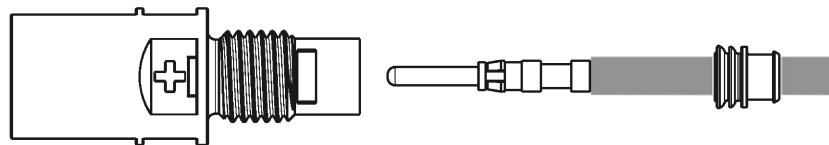


Fig. 11

- ④ Push seal into the housing

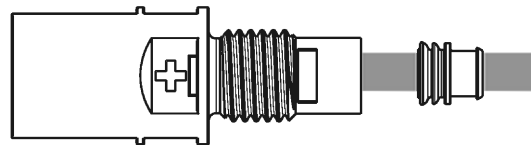


Fig. 12

- ⑤ Assembly of the cover cap (not available with every version) and mounting in front panel

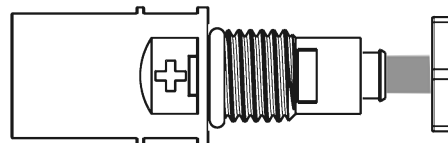


Fig. 13

- Required panel mount hole diameter: Diameter 12.5 mm.
- The panel thickness must not be under 1.0 mm.
- For environmental protection of the unmated connector, use of the covering cap is recommended.

Cover:
Part No. **1394739-1**

Note: All part numbers are RoHS compliant.

Assembly and Installation Guidelines (Continued)

4. Application Examples

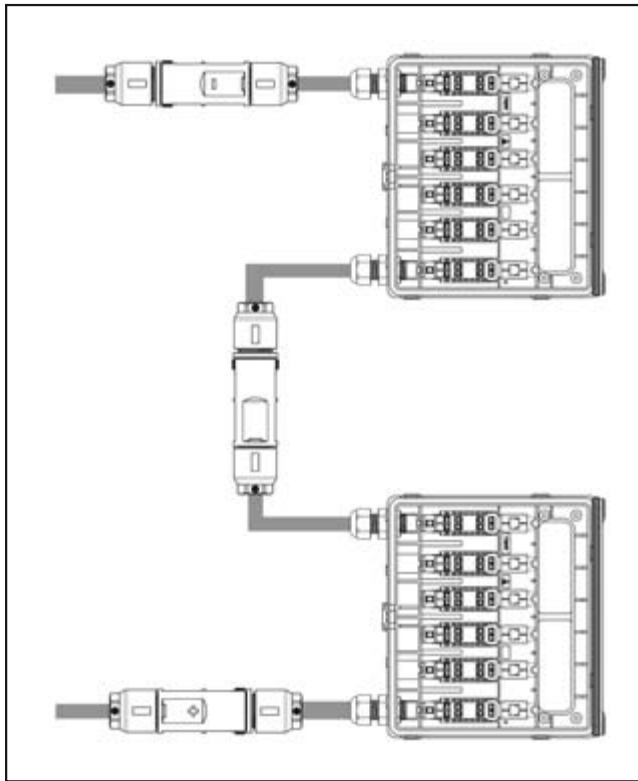


Fig. 14: Serial (Wire Diagram)

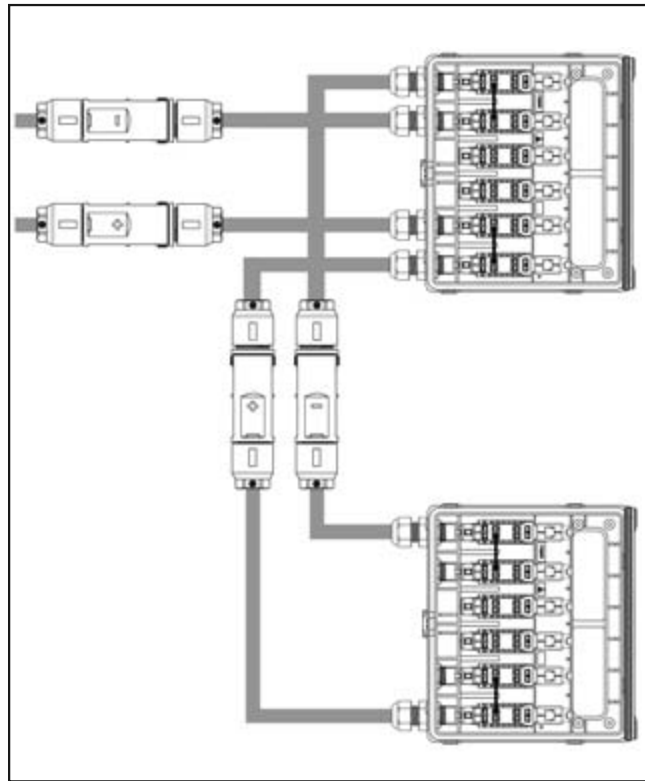


Fig. 15: Parallel (Wire Diagram)

5. Storage

See Product Specification 108-18701

6. Tooling

- The following tools are available for the contact crimping (please specify wire gauge required):
 - Hand Tool, integral Locator and Die (Part No. **1-1105851-8**), use 'HVT' position on locator
 - Hand Tool, only (Part No. **539973-1**)
- An extraction tool (Part No. **1102855-3**) is needed to disassemble the connector components. This tool is used to unlock the contact retention features, after which the contact can be removed and re-used if necessary.

Technical Description

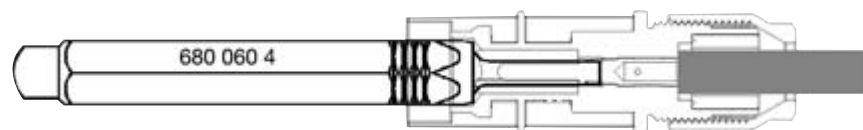


Fig. 16

Note: All part numbers are RoHS compliant.

Technical Data (Junction Box and One Pole Plug Connectors)

Materials

Socket and Pin Contacts:	CuZn
Housing:	PPO, weatherproof against UV radiation and ozone

Color

Connector, Junction Box:	Black
--------------------------	-------

Electrical Features

Withstanding Voltage:	1000 V DC
Current Rating:	up to 25 A
Contact Resistance:	$\leq 5 \text{ m}\Omega$
Contact Resistance (typical):	1 m Ω
Protection Class:	II

Mechanical Features

Junction Boxes

Dimensions:	Depending on junction box type
Temperature Range:	-40 °C to +105 °C
Wire Size Range:	up to AWG 12
Protection Degree:	IP 65, closed

Connector

Dimensions:	Diameter 18 mm, (diameter 0.71 inch)
Temperature Range:	-40 °C to +105 °C
Wire Size Range:	AWG 14, AWG 12, AWG 10 stranded wire
Protection Degree:	IP 67, mated
Contact Finish:	silver plated,
Mating Cycles:	50, silver plated
Unmating Force:	30–40 Newton
Additional Features:	Coded housing ensures mating safety Contact voltage-proof Connector with crimp technology

Standards	IEC 61215 Edition 2, 61646, IEC 61730, Protection Class II, UL 1703
------------------	--

Subject to Change.

Part Number Index

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
539630-1	23	1394725-2	27	1740220-4	6	1986166-2	14
539973-1	29	1394738-1	11	1740277-1	10	1986166-3	14
956297-1	14	1394738-2	11	1740277-2	10	1986228-1	18
956297-2	14	1394738-3	11, 21, 22	1740425-1	6	1986228-2	18
956297-3	14	1394738-4	11, 21, 22	1740425-3	6	1986228-3	18
1-956297-1	14	1394739-1	11, 28	1740479-1	12	1986228-4	18
1-956297-2	14	1418677-2	25	1740483-1	12	1986228-5	18
1-956297-3	14	1418867-1	7	1740483-2	12	1-1986228-1	18
956298-1	14	1418867-2	7	1740493-1	12	1-1986228-2	18
956298-2	14	1418867-5	7	1740493-2	12	1-1986228-3	18
956298-3	14	1418867-6	7	1740657-1	5	1-1986228-4	18
1-956298-1	14	1-1418867-2	7	1740657-8	5	1-1986228-5	18
1-956298-2	14	1-1418867-3	7	1740657-9	5	1986229-1	18
1-956298-3	14	1534611-1	10	1-1740657-0	5	1986229-2	18
956299-1	14	1534611-2	10	1740658-1	5	1986229-3	18
956299-2	14	1534858-1	24	1740658-3	5	1986229-4	18
956299-3	14	1579000-4	23	1740658-4	5	1986229-5	18
1-956299-1	14	7-1579001-8	23	1740658-5	5	1-1986229-1	18
1-956299-2	14	7-1579001-9	23	1740699-1	4	1-1986229-2	18
1-956299-3	14	4-1579002-2	23, 24	1740699-6	4	1-1986229-3	18
1102855-3	23, 24, 29	1579004-2	24	1740700-1	4	1-1986229-4	18
1-1105851-8	29	1-1579004-1	23	1740700-3	4	1-1986229-5	18
1394461-1	9	1-1579004-2	23	1740863-1	8	1986230-1	18
1394461-2	9	1579007-2	24	1740863-2	8	1986230-2	18
1394461-3	9, 16, 17, 18	1579007-3	24	1740969-1	24	1986230-3	18
1394461-4	9, 16, 17, 18, 21	1579007-5	24	1740969-2	24	1986230-4	18
6-1394461-1	9	1698664-1	16, 17	1740971-1	4	1986230-5	18
6-1394461-2	9, 21	1698664-2	16, 17	1740971-3	4	1-1986230-1	18
6-1394461-4	9	1698664-3	16, 17	1740972-1	4	1-1986230-2	18
6-1394461-5	9	1698665-1	16, 17	1740972-3	4	1-1986230-3	18
6-1394461-6	9	1698665-2	16, 17	6-1889259-2	14	1-1986230-4	18
1394462-1	9	1698665-3	16, 17	4-1899259-5	14	1-1986230-5	18
1394462-2	9	1698665-4	16, 17	4-1899259-7	14	1986231-1	18
1394462-3	9, 16, 17, 18, 21, 22	1698665-5	16, 17	4-1899259-8	14	1986231-2	18
1394462-4	9, 16, 17, 18, 21, 22	1698726-1	16, 17	4-1899259-9	14	1986231-3	18
5-1394462-5	9	1698727-1	17	5-1899259-0	14	1986231-4	18
5-1394462-6	9	1698727-2	17	5-1899259-1	14	1986231-5	18
1394465-1	25	1698727-3	17	5-1899259-2	14	1-1986231-1	18
1394465-2	25	1698727-4	17	5-1899259-3	14	1-1986231-2	18
1394465-3	25	1698728-1	16, 17	5-1899259-4	14	1-1986231-3	18
1394465-4	25	1698728-2	16, 17	5-1899259-5	14	1-1986231-4	18
1394465-5	25	1698728-3	16, 17	5-1899259-6	14	1-1986231-5	18
1394470-1	25, 27	1740210-1	11	5-1899259-7	14	1986232-1	18
1394723-3	2	1740210-2	11	6-1899259-1	14	1986232-2	18
1394723-4	2	1740210-3	11	6-1899259-3	14	1986232-3	18
1394723-5	3	1740210-4	11	6-1899259-4	14	1986232-4	18
1394723-6	3	1740210-7	11	6-1899259-5	14	1986232-5	18
1394723-9	3	1740210-8	11	6-1899259-6	14	1-1986232-1	18
1-1394723-6	2	1740210-9	11	1954381-1	20	1-1986232-2	18
2-1394723-5	2	1-1740210-0	11	1986164-2	14	1-1986232-3	18
1394725-1	27	1740220-1	6	1986164-3	14	1-1986232-4	18
		1740220-2	6	1986165-2	14	1-1986232-5	18
		1740220-3	6	1986165-3	14	2008116-1	9

For More Information

Product Information Center (PIC)

Our PIC team is there to help with any further questions.

With our experienced employees in the Product Information Center (PIC) we can offer you a reliable source of information and support for your technical queries.

To contact your local Tyco Electronics subsidiary, please refer to the address page at right.

Product and Machine Literature

Order quickly and easily by fax:

For Fax No. see address page entry for your specific region.

A large product range has extensive product literature. You can request flyers, catalogs and brochures for each of the product sectors of relevance to you.

Tyco Electronics Online

Internet Homepage:
www.tycoelectronics.com

Electronic Internet Catalog:
<http://catalog.tycoelectronics.com>



Our website is more than an Internet guide. It is constantly being added to and is an innovative and interactive source for applications tips, product updates and technical information of all types. With our innovative StepSearch software, which has been perfected over a period of several years you can conveniently surf your way through all our products.

Need more information?

Call Technical Support at the numbers listed below.

Technical Support is staffed with specialists well versed in all Tyco Electronics products. They can provide you with:

- Technical Support
- Catalogs
- Technical Documents
- Product Samples
- Tyco Electronics
Authorized Distributor
Locations

Americas

Argentina – Buenos Aires
Phone: +54-11-4733-2200
Fax: +54-11-4733-2211

Brasil – São Paulo
Phone: +55-11-3611-1311
Fax: +55-11-3611-0397

Canada – Toronto
Phone: +905-475-6222
Fax: +905-474-5520
**Product Information Center:
(Technical Support)**
Phone: +905-470-4425
Fax: +905-474-5525

Colombia – Bogota
Phone: +57-1-231-9398
Fax: +57-1-660-0206

Mexico – Mexico City
Phone: +52-55-1106-0800
+01-800-733-8926
Fax: +52-55-1106-0901

United States – Harrisburg, PA
Phone: +717-564-0100
Fax: +717-986-7575
**Product Information Center:
(Technical Support)**
Phone: +800-522-6752
Fax: +717-986-7575

**For Latin/South American
Countries not shown**
Phone: +54-11-4733-2015
Fax: +54-11-4733-2083

Asia/Pacific

Australia – Sydney
Phone: +61-2-9554-2600
Fax: +61-2-9502-2556
**Product Information Center:
(Technical Support)**
Phone: +61-2-9840-8200
Fax: +61-2-9634-6188

India – Bangalore
Phone: +91-80-285-40800
Fax: +91-80-285-40820

Indonesia – Jakarta
Phone: +65-6482-0311
Fax: +65-6482-1012

Japan – Tokyo
Phone: +81-44-844-8111
Fax: +81-44-812-3207
**Product Information Center:
(Technical Support)**
Phone: +81-44-844-8013
Fax: +81-44-812-3200

Korea – Seoul
Phone: +82-2-3415-4500
Fax: +82-2-3486-3810

Malaysia – Kuala Lumpur
Phone: +60-3-78053055
Fax: +60-3-78053066

New Zealand – Auckland
Phone: +64-9-634-4580
Fax: +64-9-634-4586

Philippines – Makati City
Phone: +632-848-0171
Fax: +632-867-8661

People's Republic of China
Hong Kong
Phone: +852-2735-1628
Fax: +852-2735-0243

Shanghai
Phone: +86-21-2407-1588
Fax: +86-21-2407-1599

Taiwan – Taipei
Phone: +886-2-8768-2788
Fax: +886-2-8768-2268

Singapore – Singapore
Phone: +65-6482-0311
Fax: +65-6482-1012

Thailand – Bangkok
Phone: +66-2-955-0500
Fax: +66-2-955-0505

Vietnam and Indochina –
Ho Chi Minh City
Phone: +84-8 930-5546
Fax: +84-8 930-3443

Europe/Middle East/Africa

Austria – Vienna
Phone: +43-1 90 5 60-0
Fax: +43-1 90 5 60-1333

Belgium – Kessel-Lo
Phone: +32-16-35-23-00
Fax: +32-16-35-23-52

Bulgaria – Sofia
Phone: +359-2-971-2152
Fax: +359-2-971-2153

Czech Republic – Kurim
Phone: +420-5-41-162-111
Fax: +420-5-41-162-223

Denmark – Glostrup
Phone: +45-43-480-452
Fax: +45-43-441-414

Egypt – Cairo
Phone: +20-2-29 04 281
Fax: +20-2-41 92 334

Estonia – Tartu
Phone: +372-5138-274
Fax: +372-7400-779

Finland – Helsinki
Phone: +358-95-12-34-20
Fax: +358-95-12-34-250

France – Cergy-Pontoise
Phone: +33-1-3420-8888
Fax: +33-1-3420-8600
**Product Information Center:
(Technical Support)**
Phone: +33-1-3420-8943
Fax: +33-1-3420-8623

Germany – Bensheim
Phone: +49-6251-133-0
Fax: +49-6251-133-1600
**Product Information Center:
(Technical Support)**
Phone: +49-6251-133-1999
Fax: +49-6251-133-1988

Germany – Langen
Phone: +49-6103-709-0
Fax: +49-6103-709-1223

Germany – Speyer
Phone: +49-6232-30-0
Fax: +49-6232-30-2243

Germany - HTS Division – Neunkirchen
Phone: +49-2247-305-0
Fax: +49-2247-305-122

Greece – Athens
Phone: +30-210-9370-396/397
Fax: +30-210-9370-655

Hungary – Budapest
Phone: +36-1-289-1000
Fax: +36-1-289-1010

Ireland – Dublin
Phone: +353-1-820-3000
Fax: +353-1-820-9790

Israel – Yokneam
Phone: +972-4-959-0508
Fax: +972-4-959-0506

Italy – Collegno (Torino)
Phone: +39-011-4012-111
Fax: +39-011-4031116

Lithuania – Vilnius
Phone: +370-5-2131-402
Fax: +370-5-2131-403

Netherlands – 's-Hertogenbosch
Phone: +31-73-624-62-46
Fax: +31-73-621-23-65
**Product Information Center:
(Technical Support)**
Phone: +31-73-6246-999
Fax: +31-73-6246-998

Norway – Nesbru
Phone: +47-66-77-8886
Fax: +47-66-77-8855

Poland – Warsaw
Phone: +48-22-45-76-700
Fax: +48-22-45-76-720

Romania – Bucharest
Phone: +40-21-311-3479/3596
Fax: +40-21-312-0574

Russia – Moscow
Phone: +7-495-926-5506/07/08/09
Fax: +7-495-926-5505

Russia – St. Petersburg
Phone: +7-812-718-8192
Fax: +7-812-718-8193

Slovenia – Ljubljana
Phone: +386-1561-3270
Fax: +386-1561-3240

South Africa – Port Elizabeth
Phone: +2741-503-4500
Fax: +2741-581-0440

Spain – Barcelona
Phone: +34-93-291-0330
Fax: +34-93-201-7879
**Product Information Center:
(Technical Support):**
Phone: +34-93-291-0330
Fax: +34-93-200-3779

Sweden – Upplands Väsby
Phone: +46-8-50-72-50-00
Fax: +46-8-50-72-50-01

Switzerland – Steinach
Phone: +41-71-447-0447
Fax: +41-71-447-0444

Turkey – Istanbul
Phone: +90-212-281-8181/2/3
Fax: +90-212-281-8184

Ukraine – Kiev
Phone: +380-044-206-2265
Fax: +380-044-206-2264

United Kingdom – Swindon
Phone: +44-8706-080-208
Fax: +44-1793-572-516
**Product Information Center:
(Technical Support)**
Freephone GB: 0800-267-666
Phone: +44-8706-080-208
Fax: +44-208-420-8081

**For Middle East/African Countries
Not Shown**
Phone: +33-1-3420-8866
Fax: +33-1-3420-8300

Tyco Electronics Corporation
Harrisburg, PA

tycoelectronics.com

© 2007 Tyco Electronics Corporation
889753-3-5M-LUG-FP-9-07

